

TRIMB ADAPTOR CABLE

Item code : VICAM-AMS-TRIMB

· CONNECT AMS CAMERAS TO YOUR MONITOR



CFX 750 (FM 750) - 2 video inputs

Adaptor cable
TRIMB



AMS
camera*



FMX (FM1000) - 4 video inputs

Adaptor cable
TRIMB




AMS
camera*



GFX750 (XCN - 1050) - 1 video input

Adaptor cable
TRIMB



AMS
camera*



TMX - 2050 (XCN - 2050) - 1 video
input TRIMB1 and 1 video input
TRIMB2

Adaptor cable
TRIMB



AMS
camera*


* Camera and original monitor are not included. All the AMS cameras are compatible with this adaptor cable (except wireless camera).

TRIMB ADAPTOR CABLE

• CFX 750 (FM 750) CONNECTION TO THE SCREEN

The video input is located at the rear of the monitor

1.

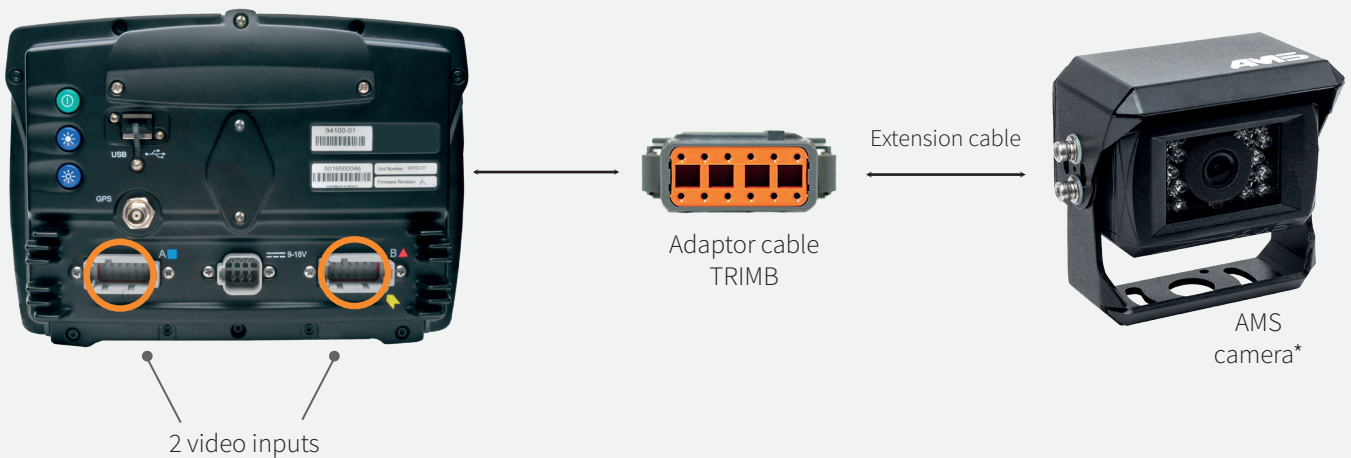

• VISUAL DISPLAY ON THE TOUCH-SCREEN

2.



Your terminal automatically detects the connection of a camera

3.



A tab appears at the top left of your monitor. A tab also appear if you connect a second AMS camera.

4.



Select the Camera tab you want displayed *


*Refer to your manufacturer's handbook to change your video settings.

TRIMB ADAPTOR CABLE

• FMX (FM 1000) CONNECTION TO THE SCREEN

The video input is located at the rear of the monitor

1.

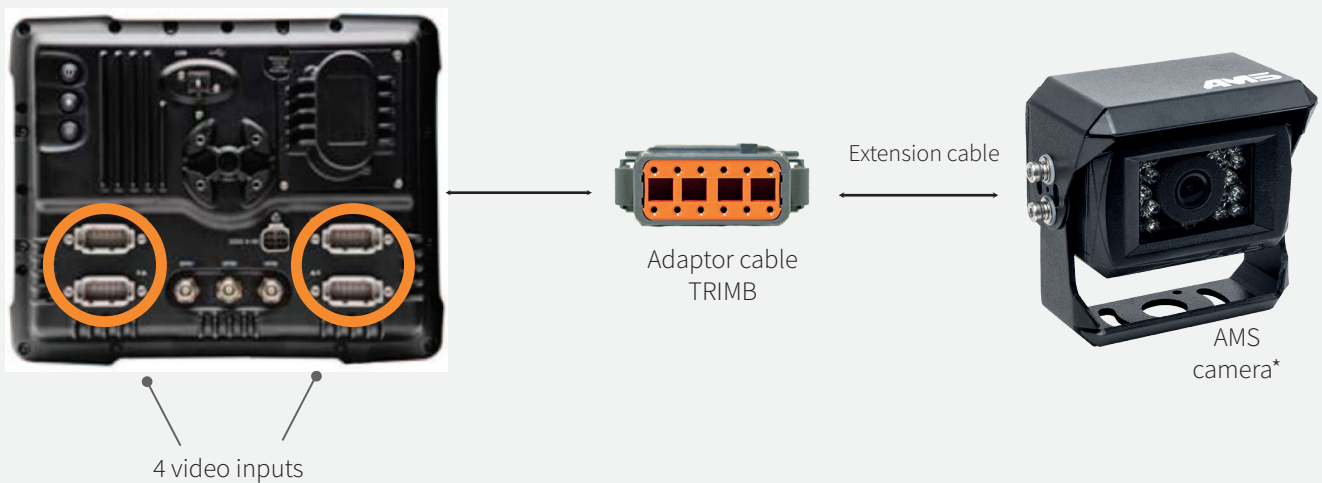


• VISUAL DISPLAY ON THE TOUCH-SCREEN

2.



Press the Configurations button

3.

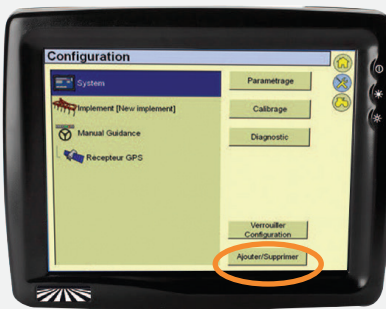

To enable the video function :
Settings > System > Add/Delete

4.



Select Cameras, press Add and then confirm with the OK button

5.



A new camera tab appears in the Configurations menu. Select the Camera tab and press Settings

6.



Select the camera number you want to display > Settings > Enabled : YES*


*Refer to your manufacturer's handbook to change your video settings.

TRIMB ADAPTOR CABLE

• GFX750 (XCN-1050) CONNECTION TO THE SCREEN

The video input is located at the rear of the monitor

1.

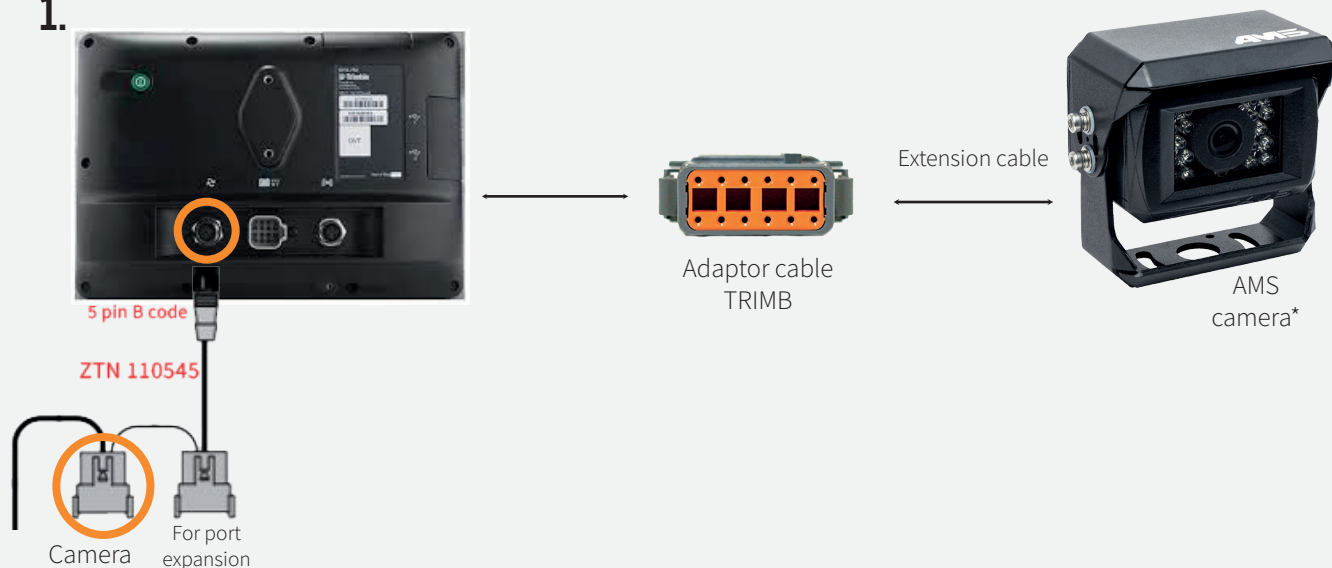

* If your monitor doesn't enable the connection of a camera, please purchase the cable ZTN110545 from CNH and then the cable TRIMB cable from AMS.


• VISUAL DISPLAY ON THE TOUCH-SCREEN

2.



Click on the button «camera»

3.

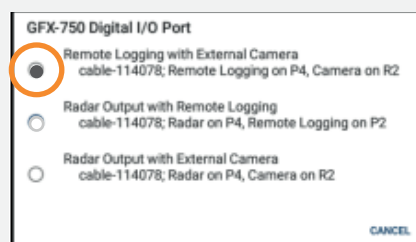

Tick to manage the cameras

4. If the option «external camera» isn't activated, please contact CNH to buy the unlocking code.

TRIMB ADAPTOR CABLE

• TMX-2050 (XCN-2050) CONNECTION TO THE SCREEN

The video input is located at the rear of the monitor


1. Connect the unit on the back of your monitor*



2. Connect the TRIMB to the TM-200 unit



Adaptor cable
TRIMB 2



Adaptor cable
TRIMB

Extension cable



AMS
camera*

*Refer to your manufacturer's handbook to change your video settings.

TRIMB ADAPTOR CABLE

• RECOMMENDATIONS

The cameras must be connected when the monitor is OFF. When you start your CFX 750 (FM750) or FMX (FM1000) monitor, it will scan the video inputs and enable them on detection of an AMS camera.

FMX (FM1000)

→ If the image appears in negative (colours inverted or degraded), increase the brightness (you can refer to your manufacturer's handbook) until you see a sharp-coloured image. The signal accepted by the screen will switch from the NTSC system to PAL.

GFX750 (XCN-1050)

→ If you want to connect another camera, please purchase the cable ZTN110545 from CNH (if it is not already on the monitor) and then the cable TRIMB cable from AMS. If your GFX750 (XCN-1050) terminal has no video input management, contact TRIMBLE to update the system. If the video function is not unlocked on your monitor, please contact CNH to buy the unlocking code.

TMX-2050 (XCN-2050)

→ If you want to connect another camera, order the TRIMB dedicated cable to connect on Port A of your TM-200 unit. If your TMX-2050 (XCN-2050) terminal has no video input management, contact TRIMBLE to update the system. You need at least version V4.2.1. of the software.

• WARRANTY

The product is guaranteed for two years as from the date of sale to the end user, remembering that the sale must take place within 24 months after delivery to the concession.

• AFTER SALES SERVICE

Reserved for professionals

→ Download the service form from our site

When returning, please include the following documents for managing repairs and the warranty:

- The return-authorisation form duly completed
- A copy of the invoice with the date of sale to the end user
- The reason for the claim, or a description of the malfunction.

For more information, contact our technical department

→ Tel : +33 (0)3 27 94 44 44 or @ : contact@ams-diffusion.com

If you are the end user

Please go to your dealer.



AMS Diffusion

Tél. +33 3 27 94 44 44

Fax. +33 3 27 94 44 45

contact@ams-diffusion.com