


VICAM-AMS-ANT-SLP-V1.0

Catalogue



VICAM-AMS-ANT-SLP-V1.0 OEM Contents	1
一、 Version number	Erreur ! Signet non défini.
二、 Logo	3
三、 Logo Jump	4
四、 Copyright Information	Erreur ! Signet non défini.
五、 Gateway Address	Erreur ! Signet non défini.
六、 Default Administor Password	7
七、 Default SSID&PS	8
八、 Default Time Zone	Erreur ! Signet non défini.
九、 Default Country Code	10
十、 Default English Page	Erreur ! Signet non défini.

一、Version

Version Serial number: VICAM-AMS-ANT-SLP-V1.0

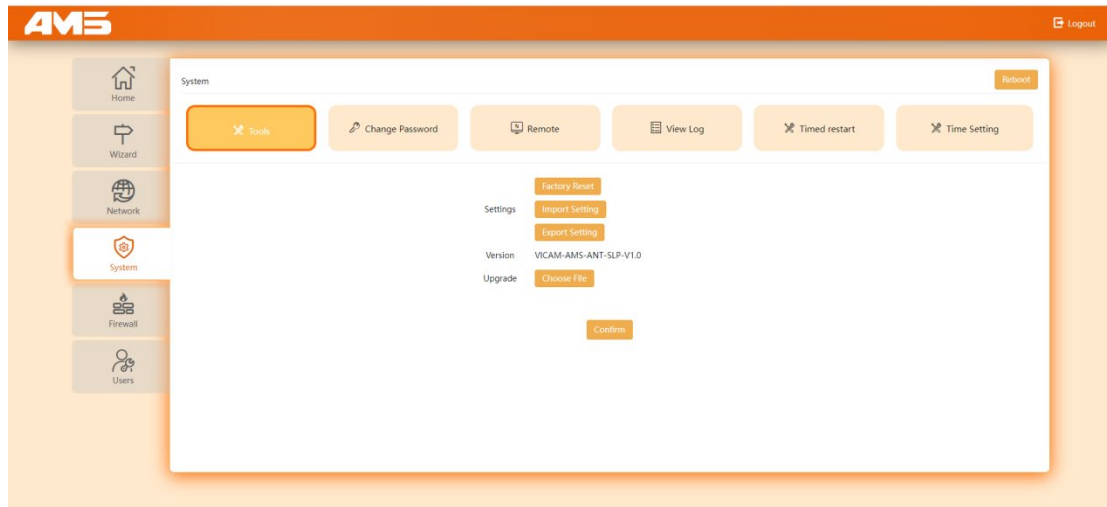


二、Logo

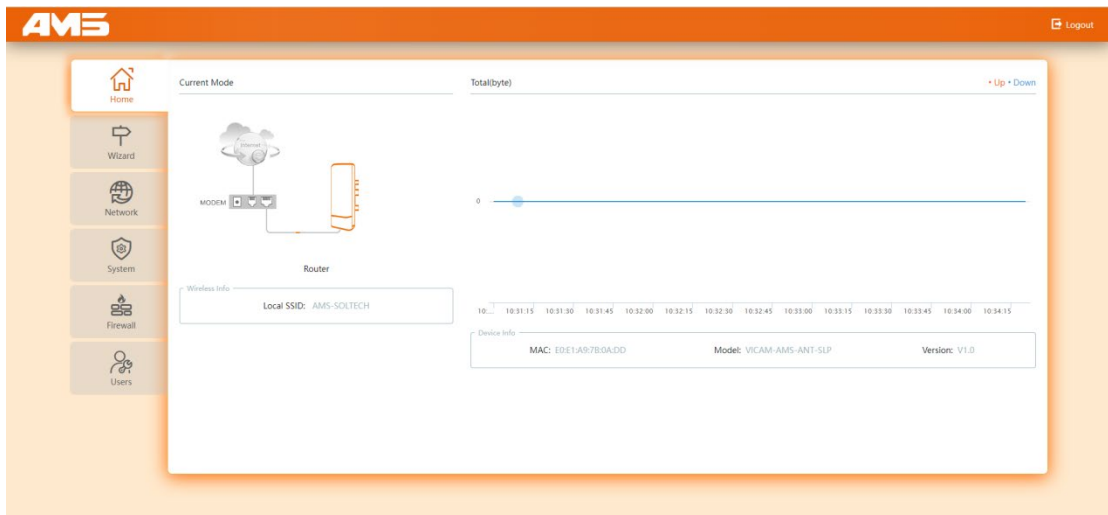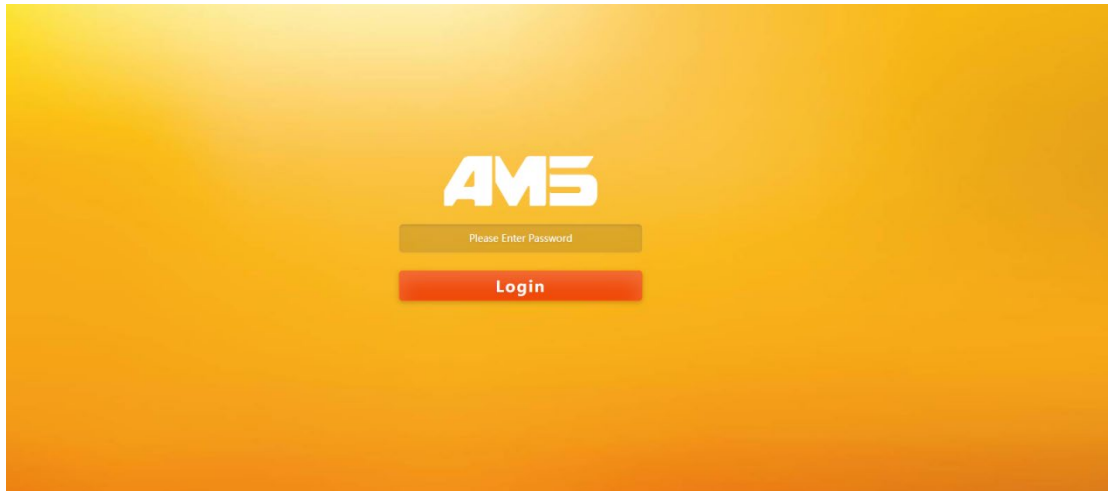



三、 Logo Jump

Logo jump to your website---<https://ams-soltech.com/>

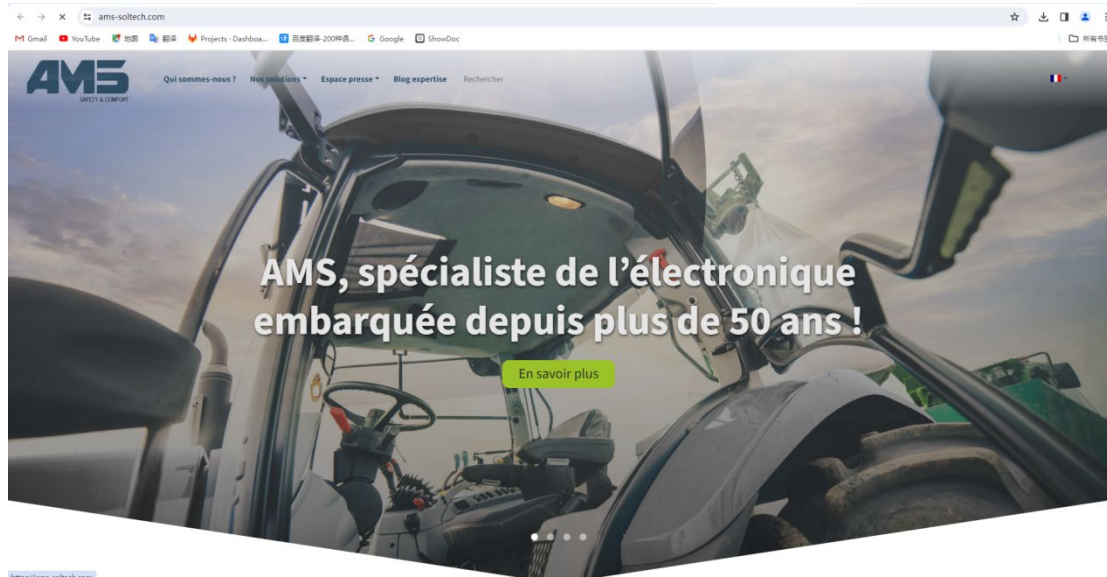


四、Copyright Info

For now, Copyright info is nothing, you can input it

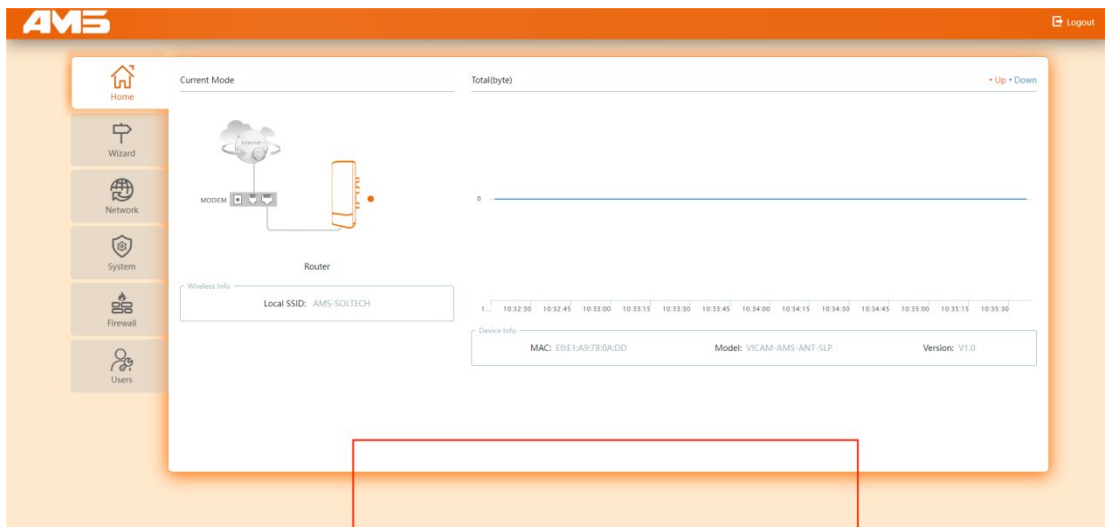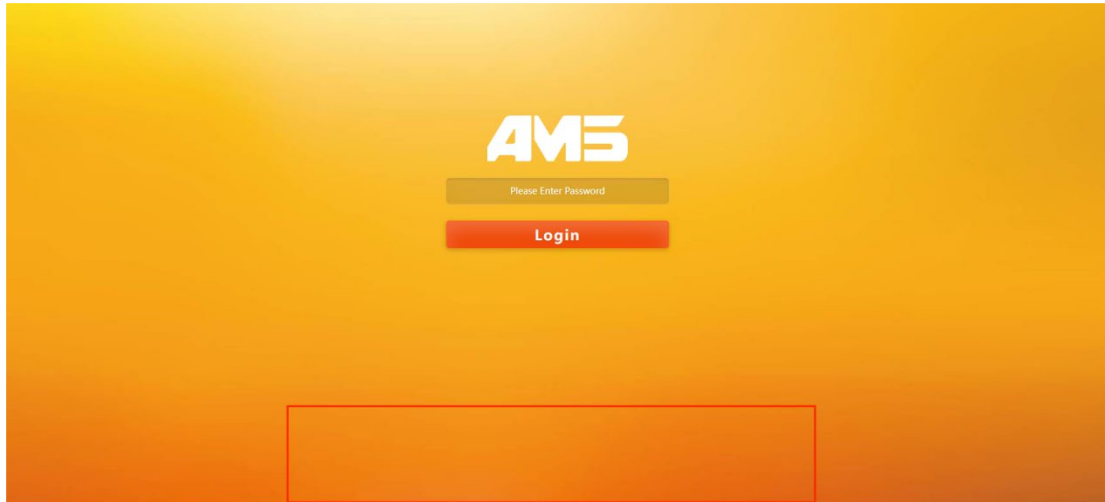


五、Gateway Add

192.168.10.1

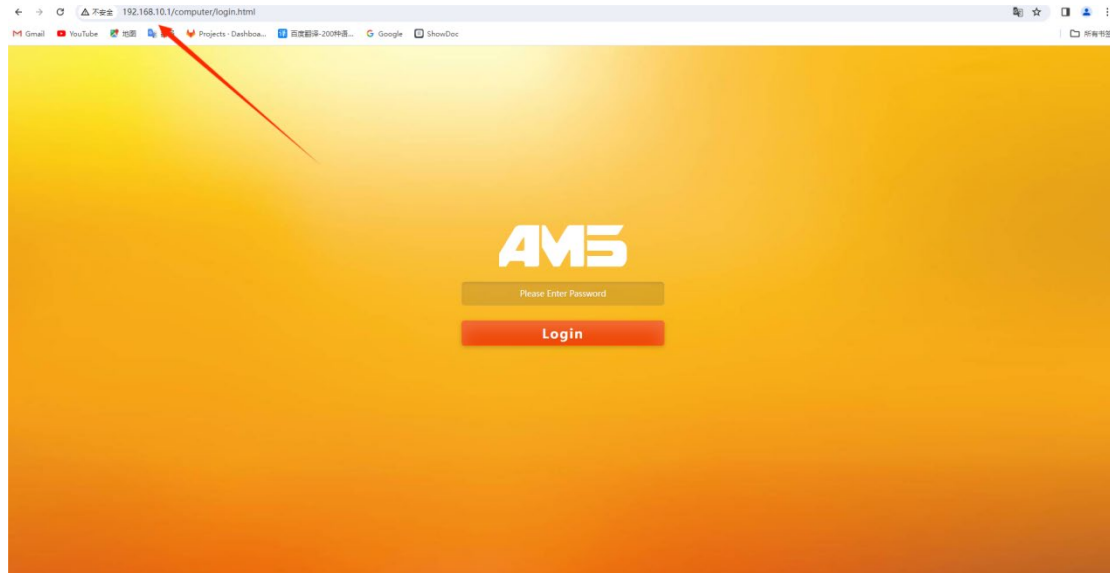

六、 Default Admin Pass


Default password is admin

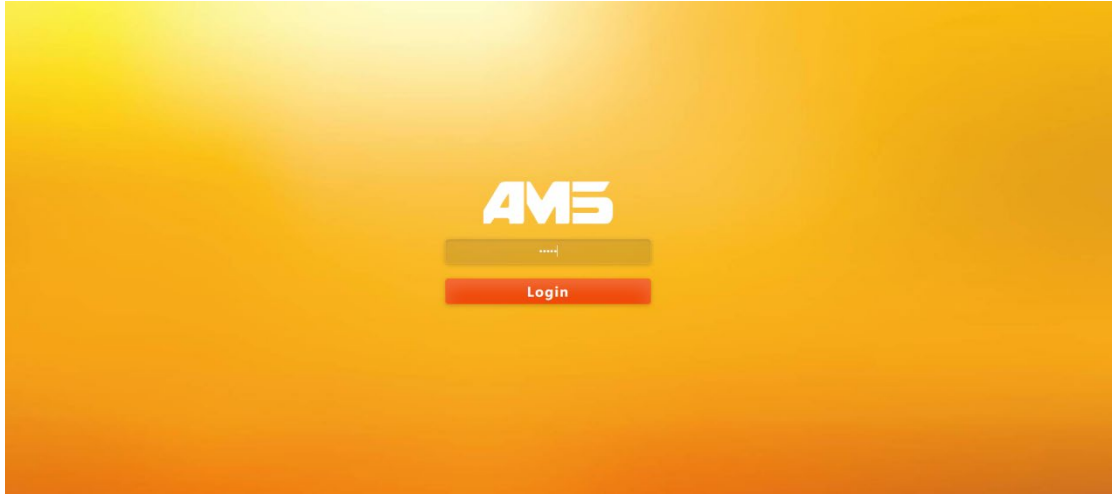

七、 Default SSID&Password

Default ssid is AMS-SOLTECH

Password is Blank as default

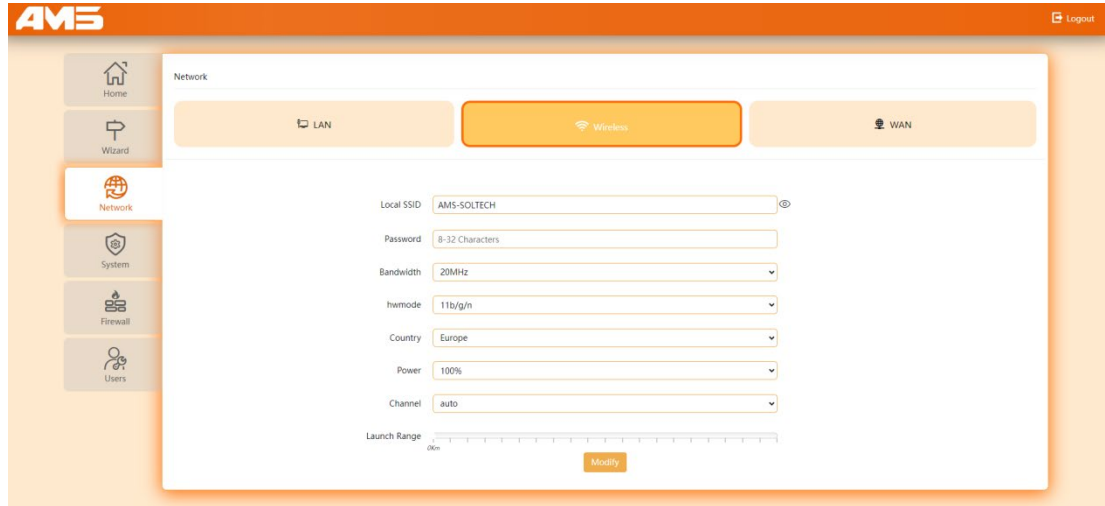


The screenshot displays the AMS web interface for network configuration. The top navigation bar includes the AMS logo and a Logout button. A sidebar on the left contains icons for Home, Wizard, Network (selected), System, Firewall, and Users. The main content area is titled 'Network' and features three tabs: LAN, Wireless (active), and WAN. The Wireless configuration form includes the following fields:

- Local SSID: AMS-SOLTECH
- Password: 8-32 Characters
- Bandwidth: 20MHz
- hwmode: 11b/g/n
- Country: Europe
- Power: 100%
- Channel: auto

At the bottom of the form, there is a 'Launch Range' slider set to 0km and a 'Modify' button.


八、 Default Time Zone

Default Time zone is France (UTC +1)

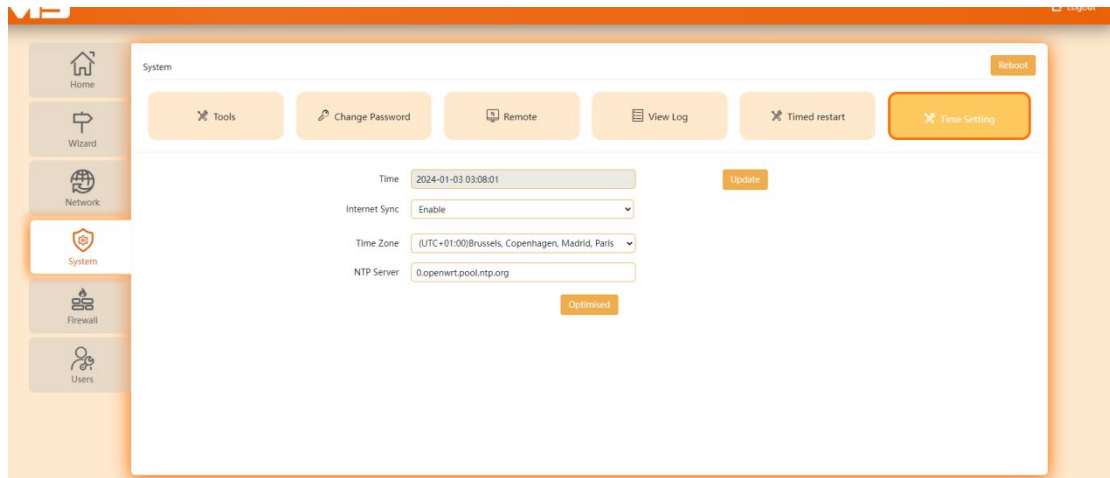

九、默认国家码

默认国家码为 EUROPE

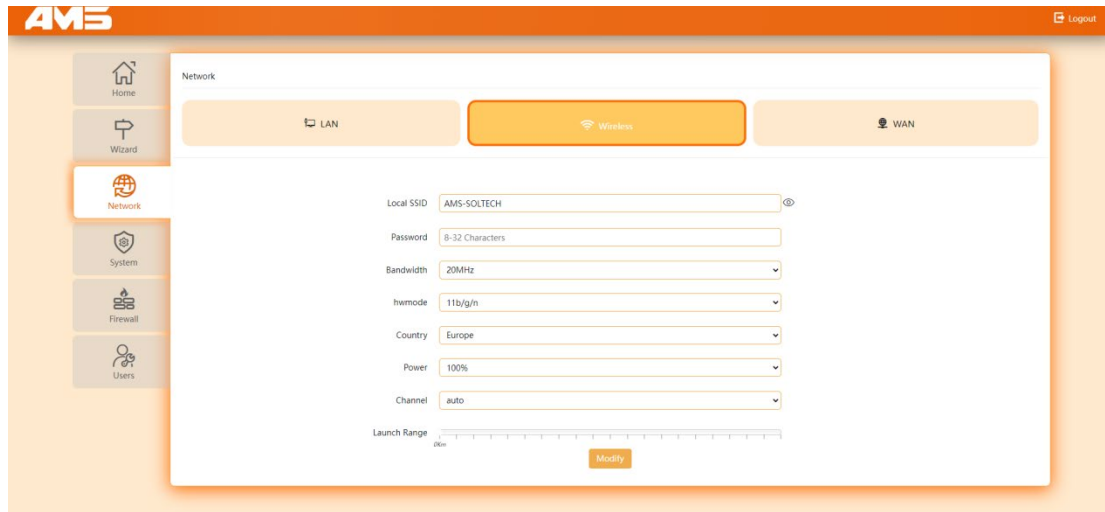

十、默认英文页面

默认为英文

